

The yarn may be used as-is, or woven into fabric, or applied to a substrate post-manufacture, e.g. embroidered to a fabric.

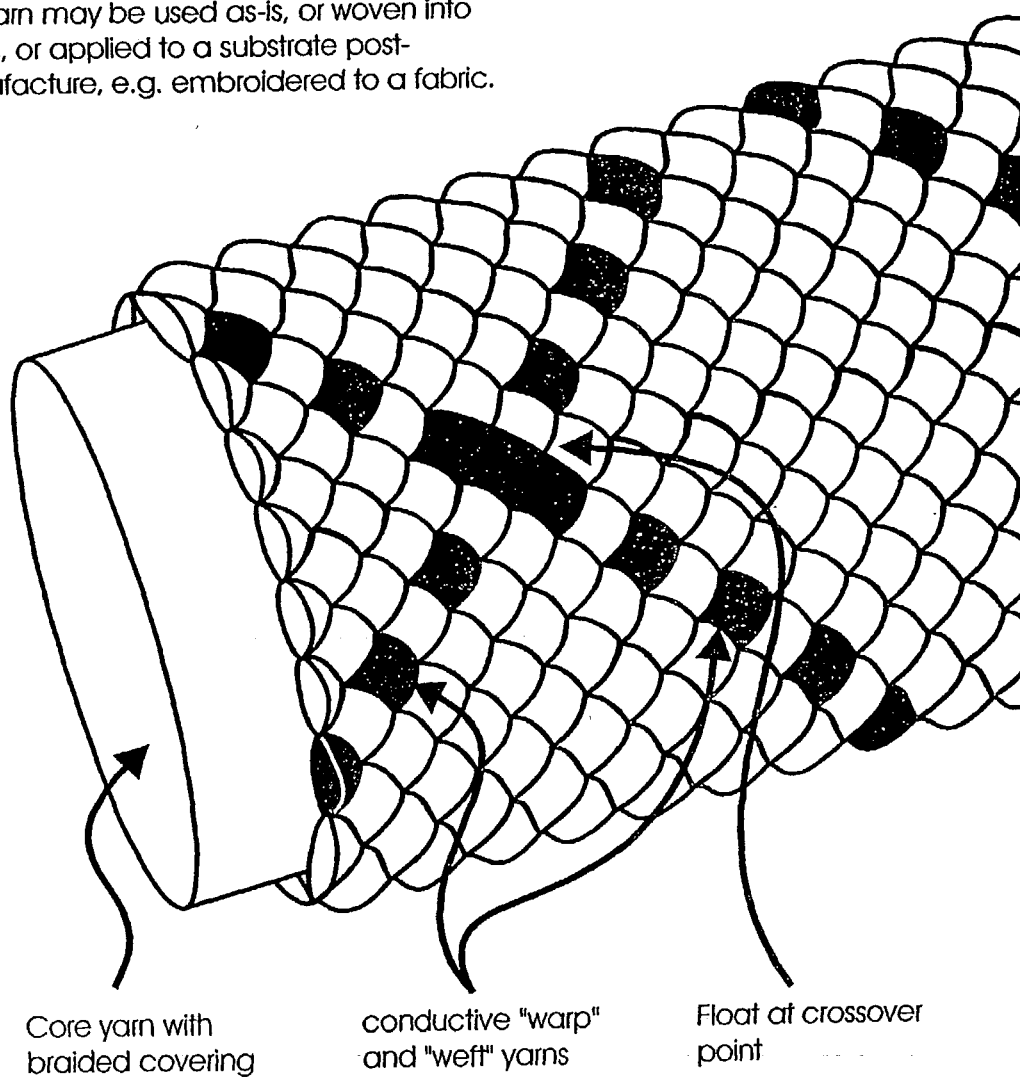


Figure 8. Translation of the described techniques from a weaving to a braiding process. The resulting composite yarn can detect an applied pressure at some point along its length